


1 W | IRC 90

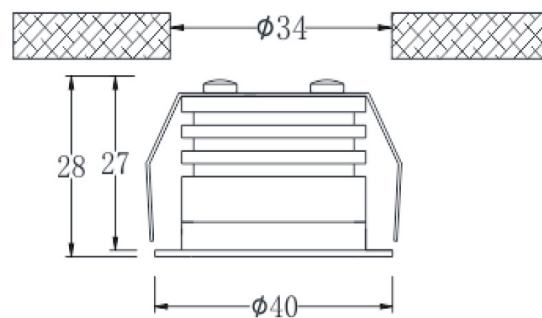

Type	Downlight orientable
Puissance	1 W
Flux	90 lm - 3 000 K
IRC	90
Gradable	Selon driver utilisé
Classe	III
Protection	IP44
Angles	15° / 38° / 60°
Encastrement	34 mm
Diamètre	40 mm
Profondeur	28 mm
Finition	Noir
Durée de vie	25 000 H

Référence	K	Angles	Flux lumineux / IRC
MS140152700N		15°	
MS140382700N	2 700 K	38°	85 lm / IRC 90
MS140602700N		60°	
MS140153000N		15°	
MS140383000N	3 000 K	38°	90 lm / IRC 90
MS140603000N		60°	
MS140154000N		15°	
MS140384000N	4 000 K	38°	95 lm / IRC 90
MS140604000N		60°	

Alimentations :  
 ✓ Livré driver non gradable

