



3 W | IRC 90

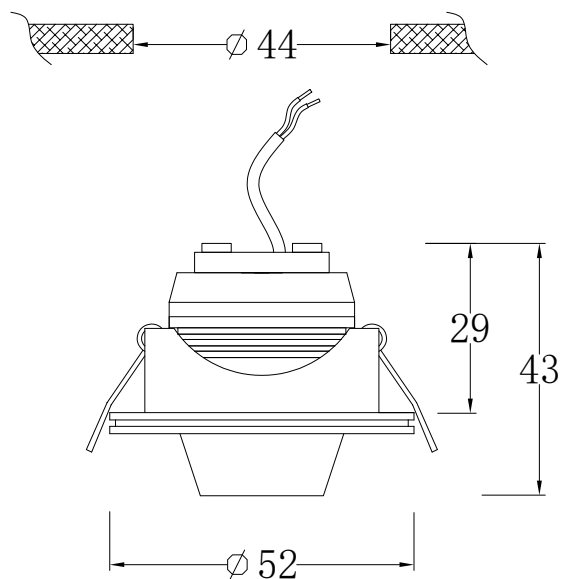

Type	Downlight orientable
Puissance	3 W
Flux	90 lm - 3 000 K
IRC	90
Gradable	Selon driver utilisé
Classe	III
Protection	IP20
Angles	15° / 30° / 45°
Encastrement	44 mm
Diamètre	52 mm
Profondeur	43 mm
Finition	blanc, aluminium
Durée de vie	25 000 H

Référence	K	Angles	Flux lumineux / IRC
MS352152700*		15°	
MS352302700*	2 700 K	30°	85 lm / IRC 90
MS352452700*		45°	
MS352153000*		15°	
MS352303000*	3 000 K	30°	90 lm / IRC 90
MS352453000*		45°	
MS352154000*		15°	
MS352304000*	4 000 K	30°	95 lm / IRC 90
MS352454000*		45°	

\* : A : Aluminium / B : Blanc

Alimentations :  
 ✓ Livré driver non gradable

