
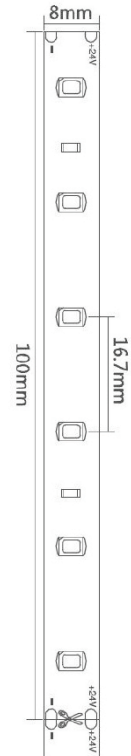


24 V | 1 180 LM

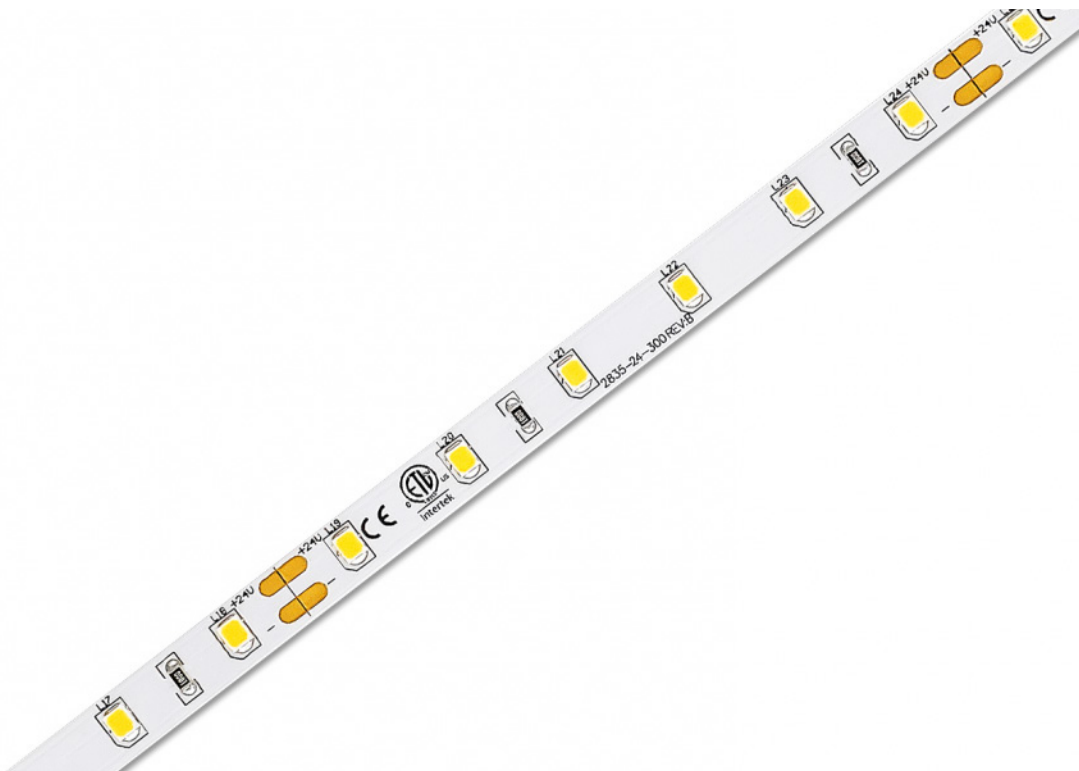

Type	Decoflex 2835 – 14,4 Watts
Puissance	14,4 Watts / ml
IRC / K	82+ : 2400, 2 700, 3000, 4 000, 5 500K
	90+ : 2700, 3000, 4 000K
Binning	3 SDCM
Tension	24 VDC
Classe	III
LED	300 LED / rouleau de 5 m
	60 LED / ml
Écart entre LED	IRC 82+ : 16,7 mm
	IRC 90+ : 8,3 mm
Gradation	PWM : 1-10 V, DALI ou DMX
Sécable	Sections de 100 mm / 6 LED
Protection	IRC 82+ : IP20 / IP54 / IP67
	IRC 90+ : IP20
Température de fonctionnement	-10° / +45°
Longueur max. connectée	5 m sur une connexion
	10 m, connexion à chaque extrémité
Durée de vie	50 000 H / L70


IRC 82+

Référence	K	Lumens / ml
**282406024	2 400 K	1 130
**282706024	2 700 K	1 160
**283006024	3 000 K	1 180
**284006024	4 000 K	1 280
**285506024	5 500 K	1 280


** : indices de protection :



IP20 : NW




IP54 : WP




IP67 : FW

IRC 90+ / 120 LED/M

Référence	K	Lumens / ml
NW282712024HC14	2 700 K	1 050
NW283012024HC14	3 000 K	1 090
NW284012024HC14	4 000 K	1 250



IP20 : NW

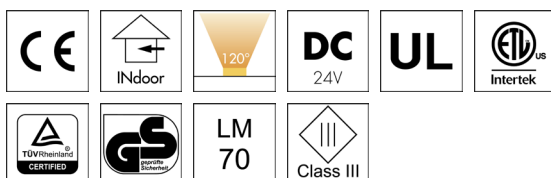

- ✓ Profils compatibles : tous modèles sauf R10 et A16
- ✓ Profils d'aluminium & diffuseurs : page 186
- ✓ Contrôle : page 235
- ✓ Alimentations : page 292

