
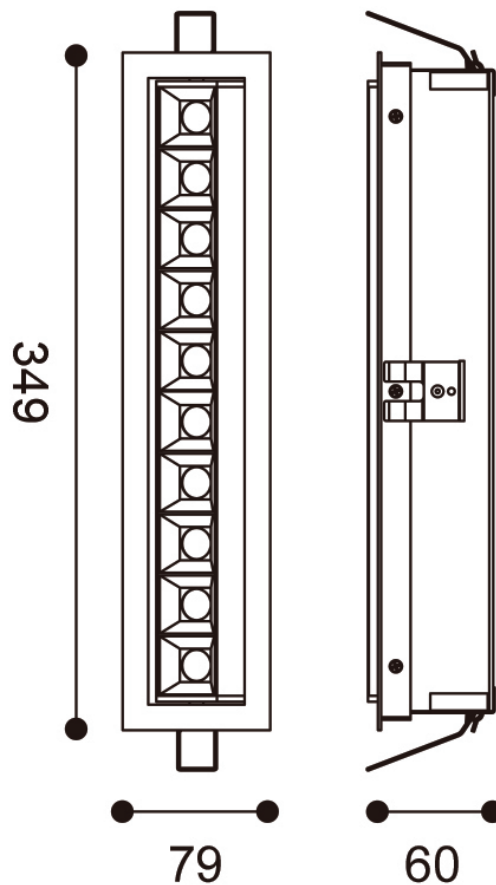


K100

10 x 2,2 W | IRC 90+

DYCHROMETA

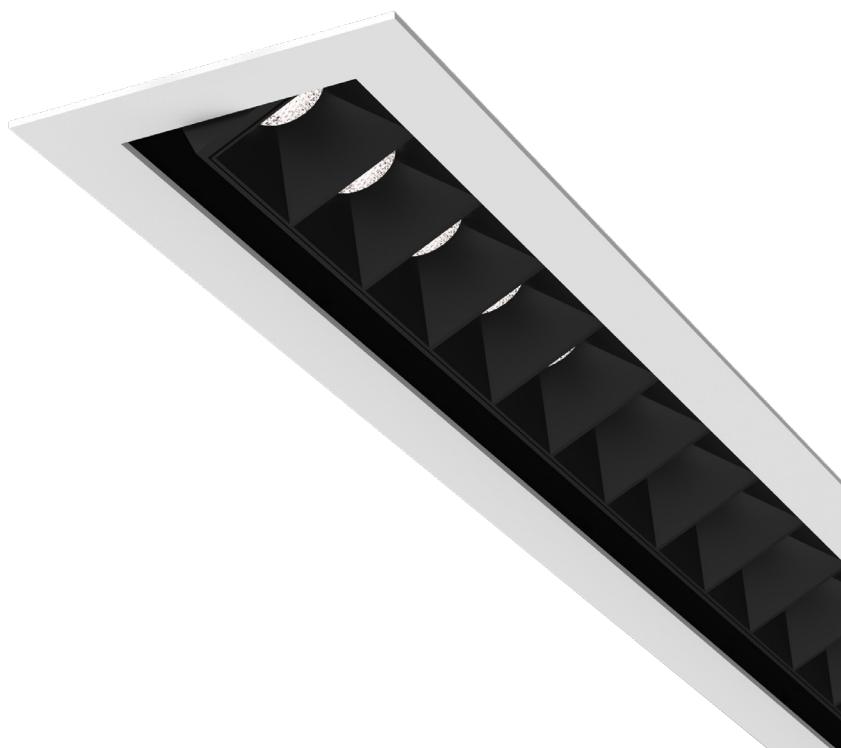

Type	Downlight orientable
Tension	30 V
Courant	700 mA
Puissance	22 W
Flux	2000 lm - 3000 K - IRC 90+
Angles	30° , 45°
UGR	<19
Classe	III
Protection	IP20
Encastrement	339 x 70 mm
Hauteur	60 mm
Dimensions	349 x 79 mm
Matériau	Aluminium, lentille optique PMMA
Finition	Blanc / Noir
Durée de vie	40 000 H L70

Référence	K	Angles	Flux lumineux / IRC
K1003027*	2 700 K	30°	1800 lm / IRC 90+
K1004527*		45°	
K1003030*	3 000 K	30°	2000 lm / IRC 90+
K1004530*		45°	
K1003040*	4 000 K	30°	2000 lm / IRC 90+
K1004540*		45°	

* : préciser couleur de la collerette B: blanche / N : noire

Autres colorimétrie sur demande.

Alimentations (à commander séparément) :

- ✓ Mean Well APC35-700, non gradable
- ✓ Gradation 1-10 V | DALI | TRIAC : nous consulter

