


15 x 2,2 W | IRC 90+

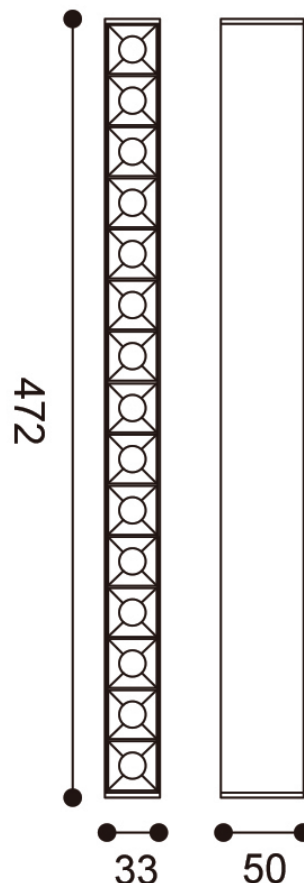

Type	Downlight
Tension	47,1 V
Courant	700 mA
Puissance	33 W
Flux	3000 lm - 3000 K - IRC 90+
Angles	10°, 15°, 30°
UGR	<19
Classe	III
Protection	IP20
Dimensions	472 x 33 mm
Hauteur	50 mm
Matériau	Aluminium, lentille optique PMMA
Finition	Blanc / Noir
Durée de vie	40 000 H L70

Référence	K	Angles	Flux lumineux / IRC
K15A1027*		10°	
K15A1527*	2 700 K	15°	2 700 lm / IRC 90+
K15A3027*		30°	
K15A1030*		10°	
K15A1530*	3 000 K	15°	3 000 lm / IRC 90+
K15A3030*		30°	
K15A1040*		10°	
K15A1540*	4 000 K	15°	3 000 lm / IRC 90+
K15A3040*		30°	

* : préciser couleur de la collerette B: blanche / N : noire

Autres colorimétrie sur demande.

Alimentations (à commander séparément) :

- ✓ Mean Well APC35-700, non gradable
- ✓ Gradation 1-10 V | DALI | TRIAC : nous consulter



LM
70

