
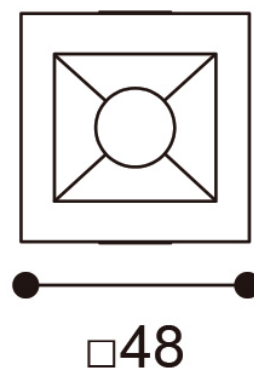


2,2W | IRC 90+

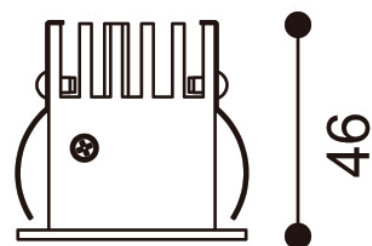

Type	Downlight
Tension	3,14 V
Courant	700 mA
Puissance	2,2 W
Flux	200 lm - 3000 K - IRC 90+
Angles	10°, 15°, 30°
UGR	<19
Classe	III
Protection	IP20
Encastrement	41 x 41 mm
Hauteur	46 mm
Dimensions	48 x 48 mm
Matériau	Aluminium, lentille optique PMMA
Finition	Blanc / Noir
Durée de vie	40 000 H L70

Référence	K	Angles	Flux lumineux / IRC
K11027*		10°	
K11527*	2 700 K	15°	180 lm / IRC 90+
K13027*		30°	
K11030*		10°	
K11530*	3 000 K	15°	200 lm / IRC 90+
K13030*		30°	
K11040*		10°	
K11540*	4 000 K	15°	200 lm / IRC 90+
K13040*		30°	

* : préciser couleur de la collerette B: blanche / N : noire

Autres colorimétrie sur demande.

Alimentations (à commander séparément) :

- ✓ QLT - A40MPL10400N, non gradable
- ✓ Gradation 1-10 V | DALI | TRIAC : nous consulter



LM
70

